

## 5.4 Products for plastering & repairs

# HYDROSTOP PLASTER PRIMER

 Preparation primer for colored plasters

### TECHNICAL SPECIFICATIONS

Form	Acrylic emulsion
Color	White, becomes transparent when dry
Application temperature	From +5°C to +35°C
Drying time	3 hours at +20°C
Resistance to alkaline environments	Excellent
pH	8.0 ± 0.5
Density	1.00 ± 0.02 kg/lit
Odorless, friendly to human and the environment	

#### V.O.C. (Volatile Organic Compounds):

Limit value of maximum content of V.O.C. per EC (Directive 2004/42/EC) for this product (category A /h: 'binding primers', type WB): 30 gr/lit (2010). The ready to use product contains maximum 2 gr/lit V.O.C..

### CONSUMPTION

1lt/10-12m<sup>2</sup> without dilution, depending on the absorbency of the substrate.

### STORAGE

Store in sealed containers and places protected from frost and direct sunlight, for at least 12 months from production date.

### SAFETY DIRECTIONS

The product needs no hazard labeling under current European and National legislation. However, it is recommended to keep away from the reach of children. If swallowed, seek immediate medical advice and show the container or label.

### PACKAGING

5lt, 20lt containers

### PROPERTIES

Water soluble acrylic micromolar primer, ideal for the preparation of surfaces to be coated with white or colored plasters.

With high penetrability, it impregnates surfaces without creating a film. It does not corrode surfaces and it effectively reduces their absorbency while maintaining their breathability.

It ensures render protection from premature surface drying (dehydration), and eliminates the risk of crack creation.

### APPLICATIONS

HYDROSTOP PLASTER PRIMER is applied to highly porous substrates, such as base coat plasters (pic.1,2) &

aircrete before the application of white or colored plaster. It also ensures color uniformity across the entire surface.

### USE

#### 1. Surface preparation


Surfaces to be primed must be dry and free from loose materials, dust, dirt, oils, various pollutants etc.

#### 2. Application

Dilute HYDROSTOP PLASTER PRIMER with water, at a ratio of 1:1 and apply it with a roller or spray. The primer must be dry before any plaster application.

### CLEANING

Clean all tools with water, immediately after use.

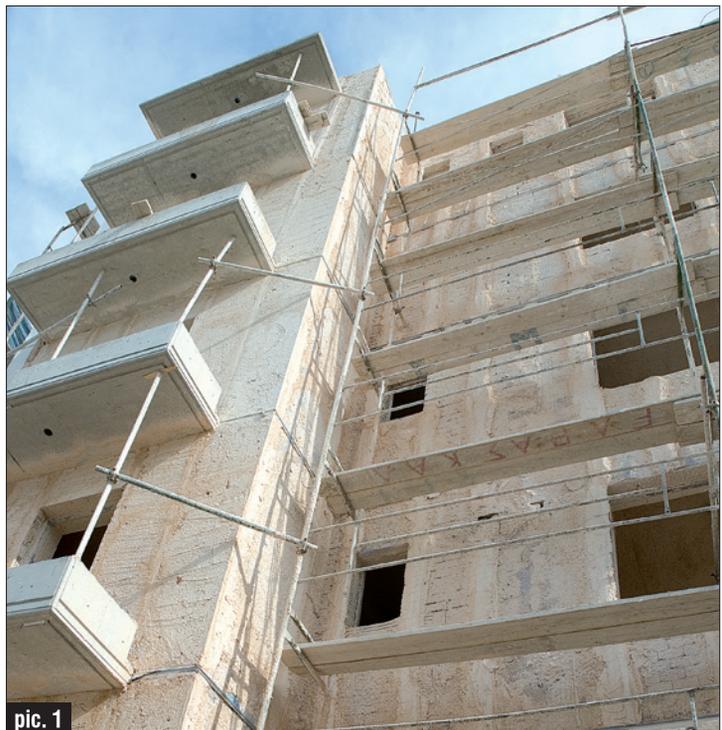

pic. 1



pic. 2