

7.2 Special application cleaners

DUROSTICK D-28 Self polishing liquid wax for wood floors



TECHNICAL SPECIFICATIONS

Form - Color	White, it becomes transparent when dry
Density	1.00 ± 0.05 kg/lt
pH	8-9
Application temperature	From +5 °C to + 35 °C
Drying time	1 hour
Foot traffic	After 3 hours
Friendly to human and the environment	

CONSUMPTION

1lt/12-14m² of surface.

STORAGE

Store in shaded places protected from frost for at least 36 months from production date.

SAFETY DIRECTIONS

The product needs no hazard labeling under current European and National legislation. However it is recommended to keep away from the reach of children. If swallowed, seek immediate medical advice and show the container or label. Before use, refer to the cautions on the product packaging or the Material Safety Data Sheet.

PACKAGING

Carton box with 15 pcs of 1lt each one 3lt containers

PROPERTIES

DUROSTICK D-28 is a self polishing metallic wax for floor surfaces. Its particular formula is based on wax and specific polymers for wood floors. A water soluble product, it creates exceptional luster and protects all floor types, including hardwood and softwood flooring surfaces, without affecting the wood color.

It protects from scuff marks, scrubbing, light scratches and dirt, as well as time related weathering and the frequent use of detergents.

It creates a transparent protective film that is anti-static, anti-slip and has a pleasant fragrance.

APPLICATIONS

Apply DUROSTICK D-28 periodically on every wood flooring surface to provide it with moisturising care and lasting shine.

USE

1. Surface preparation: Remove all the dust and any stains thoroughly, preferably using BIOCLEAN, the biodegradable, general purpose cleaner that does not damage lacquered wood surfaces. Rinse the wood flooring from the

cleaning agent thoroughly and wait for it to dry completely.


2. Application: Apply it as is, without any dilution, evenly over the entire surface, using a soft, lint-free cloth or a soft sponge. Make sure that there is no excess product left on the surface after its application. Once dry, buff lightly with a dry, soft cloth to enhance luster and sheen. To maintain the surface luster and the protection the product provides, add 2-3 bottle caps into 4-5lt of water and mop the entire floor normally. Just make sure to wring the mop well and allow the floor to dry thoroughly before any foot traffic begins.

LIMITATION OF USE

Its application is not recommended on floor surfaces previously coated with products containing oil or wax. Refrain from using the product on existing flooring surfaces that are severely worn out, damaged or without any sealer coat on them. If you are not sure about any of the above conditions, on a non visible spot of the surface, test the product before proceeding with the application across the entire surface. Check if the product dries normally and its adhesion to the substrate.



pic. 1

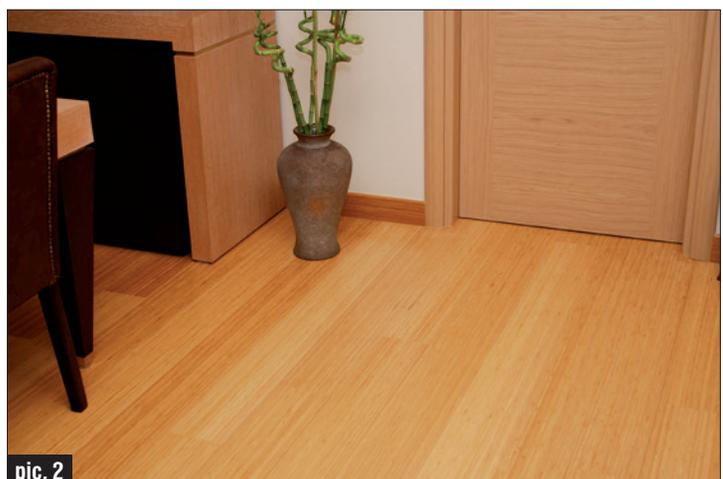

pic. 2