


DECOLUX



Decorative acrylic, solvent based varnish for style creations

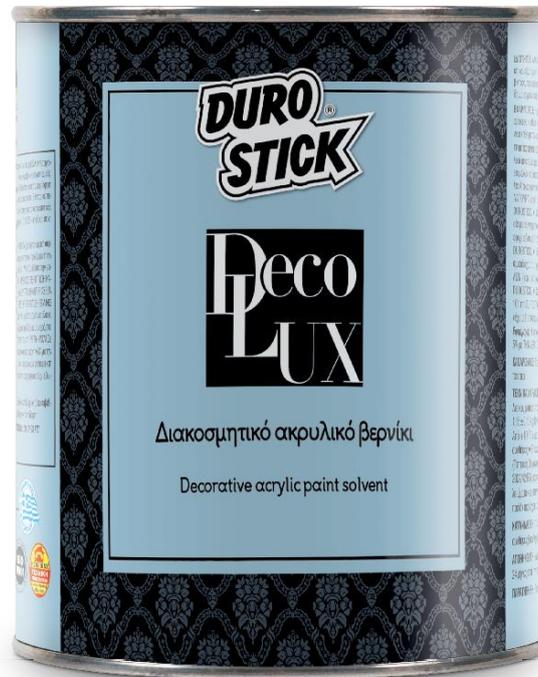

PROPERTIES

Acrylic varnish with gloss finish, ideal for mixing with the non fading, metallic styling powders, LUSO D'ORO. Extra durable and long lasting; it creates a strong, water and oil repellent, protective film that does not peel nor does it yellow over time. The combination of DECOLUX's high strength properties, and LUSO D'ORO's metallic styling powders, offers a unique aesthetic effect. An ideal and unique way to create specific decorative proposals with only limit you own imagination.

APPLICATIONS

DECOLUX varnish, as a styling system with LUSO D'ORO metallic styling powders is suitable for marble and gypsum based plasters, gypsum board, cement board, as well as MDF and chipboard. Decorates and protects wall surfaces previously coated with emulsion or acrylic paints as well as bare wall surfaces. Wood doors, cabinets and construction elements in general that are coated with enamel paints or varnishes, will

be coordinated and fitted in perfectly, within both modern and classic decorated spaces, upon application of two coats of the styling system DECOLUX with LUSO D'ORO. It transforms ceramic or cement statues and planters (big and small), by altering their aesthetic image and value, adding permanent, playful shades of gold, silver or copper, resistant to the passage of time.

USE

1. Surface preparation Surfaces have to be completely dry, clean and free from loose materials and oils.

On absorbent surfaces like gypsum board and cement board, marble and gypsum based plaster, a coat of DECOLUX mixed with LUSO D'ORO is enough, in order to stabilize and prepare them (functions as primer).

Painted surfaces with enamel or emulsion paints, just need to be dust free.

Newly painted wall surfaces, can be coated with the varnish after curing for 15 days. **Unpainted wood surfaces** have to be primed with

DECOLUX



Decorative acrylic, solvent based varnish for style creations

clear DUROXYL WOOD Protection/Conditioner (for woodworm and fungi protection). After the above preparation per application surface, the application of the DECOLUX style system with LUSSO D'ORO follows.

2. Application

Empty the entire vial of LUSSO D'ORO in 750ml DECOLUX and mix for 2-3 minutes to evenly distribute the pigments into the varnish. Allow for the mixture to sit for 1-2 minutes and repeat mixing for 2 minutes until fully homogenized. It is recommended to periodically mix the product during use, without adding any thinner. The material is applied in two coats, with a difference of 3-4 hours, with a roller mohair roll for masonry or a paint brush for small surfaces. The styling system DECOLUX plus LUSSO D'ORO is suitable as a coating, (apply it using a natural or artificial styling sponge and 'dab' the surface), for patina creations, after completing the application of the specifically manufactured primer, LUSSO D'ORO BASE DI COLORI, available in two colors, (brown and black).

NOTES

- During application of the LUSSO D'ORO & DECOLUX mixture, it is recommended to stirring regularly, in order to sustain proper dispersion of the metallic powder in the product and consequently on the surface.
- On vertical surfaces (walls), when using a roller or brush, use a minimal amount of product (varnish mixed with LUSSO D'ORO powder) in order to avoid 'runs'.
- To avoid salt stains from watering plants in new ceramic pots and concrete made planters, it is recommended to apply internally, two coats of the cementitious, brushable waterproofing product, D-9 of DUROSTICK.
- Before applying the product, surfaces have to be completely dry.
- Once dry, the product is harmless to health.

CLEANING

Clean all tools with THINNER 201 of DUROSTICK, immediately after use.

CONSUMPTION

1lt/5-8m², on properly prepared surfaces, depending on their absorbency.

STORAGE

Store in close containers, away from any heat source, for at least 24 months from production date.

SAFETY DIRECTIONS

The product is classified as highly flammable and harmful. It is recommended to keep away from the reach of children and apply it in well ventilated areas. Before use, refer to the cautions on the product packaging or the Material Safety Data Sheet.

PACKAGING

Carton box with 12 pcs of 750ml each one 2.5lt container

DECOLUX



Decorative acrylic, solvent based varnish for style creations

TECHNICAL SPECIFICATIONS	
Form - Color	Liquid - Transparent
Resin	Acrylic
Density	0.94±0.05kg/lt
Solids by weight	32-35% w/w
Application temperature	From +5°C to + 35°C
Gloss	Gloss
Drying time	3-4 hours, depending on the weather conditions (moisture, temperature)
V.O.C. (Volatile Organic Compounds): Limit value of maximum V.O.C. content per EC (Directive 2004/42/EC) for the particular product (Class A/h: 'Binding primers' Type SB): 750gr/lt (2010). The ready to use product contains maximum 630gr/lt V.O.C.	

DUROSTICK S.A.

MANUFACTURING OF ADHESIVES, PAINTS & MORTARS

ATHENS: ASPROPYRGOS, ATTICA, GR: 193 00, Tel:

+30 211 60 03 500-599, +30 210 55 16 500, +30 210 55

98 350, Fax: +30 210 55 99 612

THESSALONIK: INDUSTRIAL PARK-SINDOS, S.B. 44,

STREET, DA 0, GR: 570 22, Tel: +30 2310 795 797, +30

2310 797 365, Fax: +30 2310 797 367

E-mail: info@durostick.com

The technical specifications and directions of use contained in this technical brochure are the results of the knowledge and experience of the company's research and development department, as well as from the real-life applications of the product. The recommendations and suggestions regarding the use of the products are made without guarantee since the respective conditions during their application are beyond the control of the company. For this reason, it is the user's responsibility to make sure that the product is suitable for the intended application as well as the application conditions of the project.