


ROMIX TRADE SERIES



General purpose emulsion paint

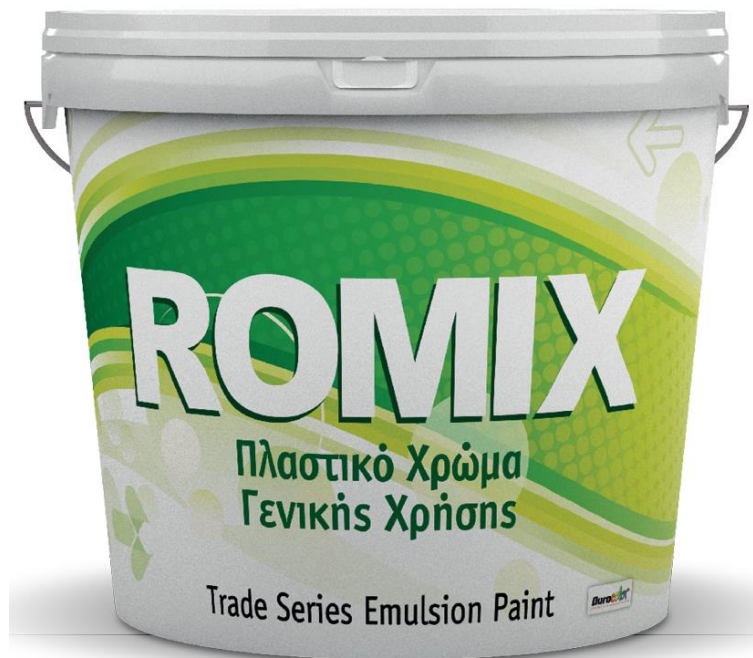

PROPERTIES

Trade series waterborne emulsion paint based on PVA-VEOVA copolymers, low odor. Very economical, combines whiteness and coverage, ease of application and spreading. A minimum quantity of pigments of the DUROCOLOR dosing system in syringes is enough to create the desired shades. It is the affordable choice for renewing all interior surfaces.

APPLICATIONS

ROMIX TRADE SERIES is suitable for existing or new interior surfaces to be recoated made of plaster, gypsum board, MDF on walls, ceilings, staircases and other spaces in need of frequent repainting.

USE

1. Substrate preparation

Surfaces from concrete and marble based plaster have to be dry, at least 30 days from their construction, and free from loose materials.

Surfaces soiled with soot and air pollution, are cleaned with the biodegradable cleaner BIO-CLEAN (for nicotine and soot) or they are primed with METAL PRIMER of DUROSTICK.

Already painted, sound surfaces two coats of ROMIX TRADE SERIES of DUROSTICK are enough

2. Application

Dilute ROMIX TRADE SERIES with water at a ratio of up to 5%, depending on the substrate, and stir well. Apply with brush, roller or airless spray gun in 3 coats. Apply each additional coat, after the previous one is completely dry.

CLEANING

Clean all tools with water and detergent solution, immediately after use.

PERFORMANCE

Approximately 9-11m²/lt per coat, depending on the texture, the absorbency of the surface and the application method.

ROMIX TRADE SERIES



General purpose emulsion paint

STORAGE

Store in places protected from sunlight and frost, for at least 18 months from production date.

NOTE

If needed, it is recommended to clean the freshly painted surface that ROMIX TRADE SERIES was used, with a soft sponge and mild detergent, 20 days after its application.

SAFETY DIRECTIONS

The product needs no hazard labeling under current European and National legislation. However, it is recommended to keep the product away from the reach of children. If swallowed, seek immediate medical advice and show the container or label.

PACKAGING

Carton box with 12 pcs of 750ml each one
3lt container (on a 120 pcs pallet)
9lt container (on a 48 pcs pallet)

TECHNICAL SPECIFICATIONS

Color	White that does not yellow over time
Shades	20 basic DUROCOLOR liquid pigments in 20ml syringe packaging, that create 120 permanent colors.
Washability	> 5,000 cycles (per DIN 53778)
Gloss	Matte
Drying time	1 hour (touch dry), depending on the ambient conditions
Recoating time	4-5 hours, depending on the ambient conditions
Application temperature	From +8°C to +35°C
Flammable	No
V.O.C. (Volatile Organic Compounds): <i>Limit value of maximum V.O.C. content per EC (Directive 2004/42/EC) for the particular product (Class A/a: 'Matte coatings for interior walls and ceilings' Type WB): 30gr/lt (2010). The ready to use product contains maximum 21gr/lt V.O.C.</i>	

DUROSTICK S.A.

MANUFACTURING OF ADHESIVES, PAINTS & MORTARS
ATHENS: ASPROPYRGOS, ATTICA, GR: 193 00, Tel: +30 211 60 03 500-599, +30 210 55 16 500, +30 210 55 98 350, Fax: +30 210 55 99 612
THESSALONIK: INDUSTRIAL PARK-SINDOS, S.B. 44, STREET, DA 0, GR: 570 22, Tel: +30 2310 795 797, +30 2310 797 365, Fax: +30 2310 797 367
E-mail: info@durostick.com