


ULTRAFIX THERMO



Fiber-reinforced adhesive for insulation boards

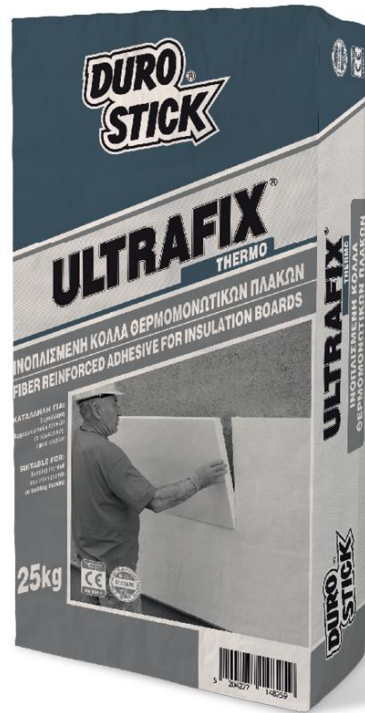

PROPERTIES

Cementitious adhesive, suitable for adhesion of polystyrene insulation boards. Polymer resins are contained within its fiber reinforced composition, providing great adhesion to substrates made of concrete, plaster, brick or cinderblock, as well as providing it with the crucial flexibility required in its various applications.

Classified GP: CS IV/W2 per EN 998-1.

APPLICATIONS

ULTRAFIX THERMO is suitable for external thermal insulation systems for buildings. It offers great bonding ability for adhering thermal insulation boards to building facades but also applied as their base coat, in combination with the reinforced fiberglass mesh, DS-4160 of DUROSTICK.

USE

1. Surface preparation

The application surface should be flat, clean and free from loose materials, dust and oils. All highly absorbent surfaces must be soaked with water

or primed with the micromolar primer, AQUAFIX of DUROSTICK which stabilizes and creates the ideal conditions for adhesion with the substrate.

2. Application

Empty the mortar in approximately 6.5lt of clean, cool water, and mix with a low-rpm drill. Allow for the mixture to mature for 5-10 minutes. Stir occasionally during use without adding extra water.

On flat surfaces: Apply the adhesive to the thermal insulating board, 'comb' the adhesive evenly over the entire surface with a notched trowel and install it on the wall.

On non-flat surfaces: Apply the adhesive around the edges of the insulating board with a margin trowel and on spots (dots) to the rest of the surface. Place the board on the wall and apply pressure on its surface, to ensure safe and uniform contact between the adhesive and the substrate. The installation requires levelling, in order to ensure the evenness of the adhered board surface. At least 24 hours later, depending on the building size and height, apply the appropriate number of plastic fasteners (anchors).

ULTRAFIX THERMO



Fiber-reinforced adhesive for insulation boards

Apply it as reinforcing top coat for insulating boards: Using a notched trowel, apply across the entire surface, a thin coat (3-5mm) of the adhesive, and encapsulate in it the reinforcing fiberglass mesh of DUROSTICK DS- 4160. Using the trowel, and once the mesh installation is completed smooth the surface. On complete cure, coat the surface with HYDROSTOP PLASTER ELASTIC, the waterproof flexible plaster, available in smooth or textured finish. Alternatively, use the silicone based plaster HYDROSTOP SILICONE PLASTER or the acrylic based plaster HYDROSTOP ACRYLIC PLASTER, both plasters in paste form.

CLEANING

Clean tools and equipment with water, immediately after use.

CONSUMPTION

As adhesive: 2.5-4kg/m², depending on notch size and substrate.

As mesh coating layer: 1.5kg/m²/mm to cover the fiberglass mesh.

STORAGE

Store in factory sealed packages, in dry and shaded places for at least 12 months from production date.

SAFETY DIRECTIONS

The product contains Portland cement. Before use, refer to the cautions on the product packaging or the Material Safety Data Sheet.

NOTE

After hardening, the product is harmless to health and the environment.

PACKAGING


Paper bag of 25kg on 1,500kg pallet

TECHNICAL SPECIFICATIONS (<i>Measurement conditions 20°C and 65% R.H.</i>)	
Form - Color	Cementitious mortar - White, Gray
Toxic	No
Bulk density of dry mortar	1,40±0,10kg/lt
Bulk density of fresh mortar	2,00±0,10kg/lt
Maximum grain size	1,3mm
Water requirement	6,5lt water in 25kg mortar
Application temperature	From +5°C to +35°C
Pot life	At least 5 hours
Open time, per EN 1346	20 minutes
Time for minor adjustments	25 minutes
PRODUCT PERFORMANCES	
Strength after 28 days, per EN 1015-11, to:	
• flexion	6.50±1.00 N/mm ²
• compression	13.00±1.50 N/mm ²
Adhesion strength after 28 days:	
• On concrete, per EN 1015-12	≥ 1.00 N/mm ²
• On expanded polystyrene (EPS), per ETAG 004	> 0.08 N/mm ² (exceeds the standard by 50%)
• Capillary water absorption (c), per EN 1015-18	≤ 0.10kg/m ² min0.5
Water vapor diffusion coefficient per EN 1015-19	μ 15/35
Thermal conductivity λ10, dry per EN 1745 (Table A.12)	0.82 W/m.K
Reaction to fire, per EN 13501-1	Euroclass A1

ULTRAFIX THERMO



Fiber-reinforced adhesive for insulation boards

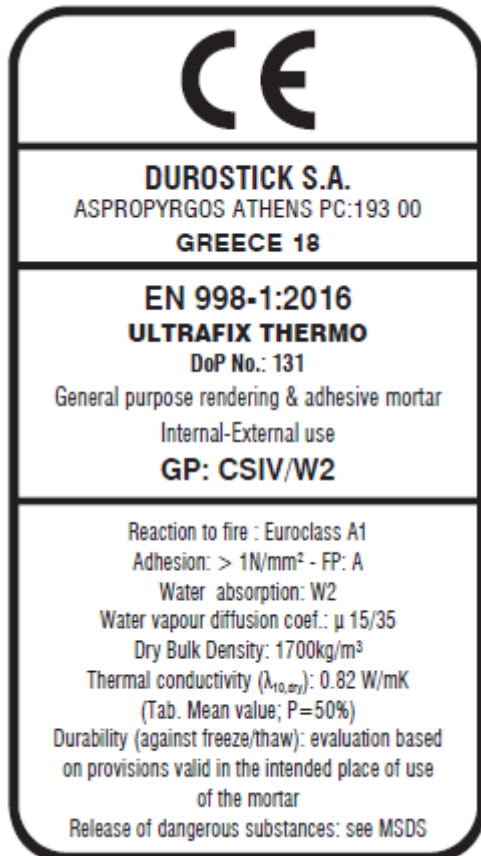

DUROSTICK S.A.

MANUFACTURING OF ADHESIVES, PAINTS & MORTARS

ATHENS: ASPROPYRGOS, ATTICA, GR: 193 00, Tel:

+30 211 60 03 500-599, +30 210 55 16 500, +30 210 55

98 350, Fax: +30 210 55 99 612

THESSALONIK: INDUSTRIAL PARK-SINDOS, S.B. 44,

STREET, DA 0, GR: 570 22, Tel: +30 2310 795 797, +30

2310 797 365, Fax: +30 2310 797 367

E-mail: info@durostick.com