


SUPER ACRYLIC



Tile adhesive

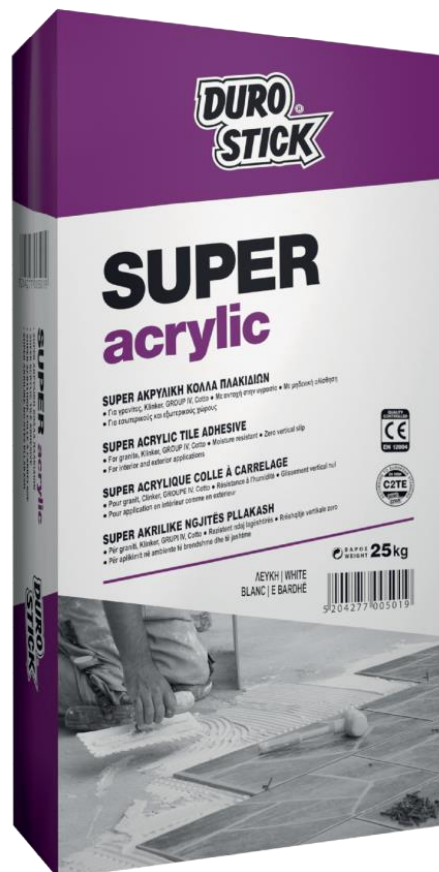

EPD®

■ PROPERTIES

Cementitious white tile adhesive, reinforced with acrylic resins. High in quality and bonding strength, it has powerful adhesion, zero slip, and extended open time. Once cured, the adhesive is resistant to moisture, frost, and fungi formation. Classified C2TE per EN 12004.

The product has received an Environmental Product Declaration (EPD) following an assessment of the environmental impact of its life cycle.

Registration number: S-P-13561,
The International EPD® System.

■ APPLICATIONS

SUPER ACRYLIC is suitable for installing low and non absorbent tiles, όπως klinker, cotto, granites, glass mosaics and porcellan tiles, on floor cement screeds

and plastered walls. Recommended for installations on existing mosaic floors or floors that are subject to intense stresses. Its thixotropy even allows for wall tile installations top down.

Use it for both interior and exterior applications. Adding DUROSTICK ACRYLIC EMULSION in the mixing water, at a ratio of 1:1, improves its technical characteristics.

The improved (as per its flexibility) adhesive, is suitable for radiant floor heating systems as well as substrates subjected to vibrations or expansions and contractions.

■ USE

1. Surface preparation

The application surface has to be sound, clean and free of loose materials, dust, paint, grease and oils.

The technical specifications and directions of use contained in this technical data sheet are the results of the knowledge and experience of the company's research and development department, as well as from the real-life applications of the product. The recommendations and suggestions regarding the use of the products are made without guarantee since the respective conditions during their application are beyond the control of the company. For this reason, it is the user's responsibility to make sure that the product is suitable for the intended application as well as the application conditions of the project.



Tile adhesive

The surface has to be soaked before the application. It is necessary to prime all absorbent substrates and aircrete, using either DUROSTICK ACRYLIC EMULSION or D-20, at a mixing ratio of 1:1 with water. It is necessary to prime all drywall using either the micromolar stabilizer AQUAFIX or SOLVENT BASED PRIMER of DUROSTICK. Lightweight or else, unsound cement screeds, must necessarily be primed with DUROSTICK ACRYLIC EMULSION or D-20 at a ratio of 1 part additive to 2 parts water or 1 part DUROMAX to 5 parts water. Follow all balcony and terrace applications by coating the substrate with HYDROSTOP FLOOR or D-1, with 2-3 successive, crosswise coats to ensure the waterproofing of the substrate.

2. Application

Empty 25kg of the adhesive into a clean container with 6.5-7.0lt of cool water. Mix with a low rpm electric mixer until a lump free, homogeneous mass is created. Allow the mixture to mature for 5-10 minutes. During use mix periodically, without adding extra water. Apply the adhesive using a notched trowel and spread on the substrate evenly. Coat as much surface as is required to work for the next 15-30 minutes (depending on weather conditions), thus avoiding skin formation. Finally, install the tiles in the selected position by tapping softly with a rubber mallet.

When working with medium and large format tiles, the installation is done by the method of double-coat application, on the substrate, but also on the tile (tile back buttering).

■ NOTE

On exterior surfaces, it is highly recommended to create expansion joints every 16-20m². Prime the expansion joints with PRIMER-PU, to improve grip, fill them with the backer rod of DUROSTICK, DS-265, and seal them with the polyurethane sealant, DUROFLEX-PU. Similarly, seal all the joints (5-8mm) at the junction of the tiles and vertical surfaces throughout the perimeter. Alternatively, the application of DS POLYMER sealant, available in 32 colors (same ones with the grout colors of DUROSTICK), ensures sealing without cracking

at the junction of the tiles with the skirting and above it as well.

■ CLEANING

Clean all tools with water, immediately after use.

■ CONSUMPTION

3-5kg/m², depending on the size of the notch of the trowel, the smoothness of the substrate and the dimensions of the tiles.

■ STORAGE

Store in the factory sealed packages, in dry and shaded places, for 12 months from production date.

■ SAFETY DIRECTIONS

The product contains Portland cement.
Before use, refer to the cautions on the product's packaging or the Safety Data Sheet.

■ PACKAGING

Paper bag of 25kg on 1.500kg pallet.



Tile adhesive

TECHNICAL SPECIFICATIONS

(Measurement conditions 23°C and 50% % R.H.)

■ Form - Color	Cementitious mortar - White
■ Bulk density of dry mortar	1.35±0.05kg/lt
■ Slip per EN 1308	< 0.5mm
■ Water requirement:	6.5lt water per 25kg mortar
■ Application temperature	From +5°C to +35°C
■ Temperature resistance	From -35°C to +90°C
■ Application thickness	Up to 10mm
■ Pot life	Approximately 5 hours*
■ Open time per EN 1346	30 minutes*
■ Time for minor adjustments	30 minutes*
■ Grouting	After 4-8 hours on wall, after 24 hours on floor
■ Foot traffic	After 24 hours
■ Delivery to use	After 12-14 days

PRODUCT PERFORMANCES

■ Adhesion strength, per EN 1348, after:	
• 28 days	1.50 N/mm ²
• Thermal ageing at +70°C	1.30 N/mm ²
• Water immersion for 21 days	1.40 N/mm ²
• 25 freeze - thaw cycles	1.35 N/mm ²

* Depending on the weather conditions
(temperature, humidity).

NOTE: Exceeds the statutory requirements of the C2
adhesive standard.

DUROSTICK S.A.,
MANUFACTURING OF ADHESIVES,
PAINTS & MORTARS
ATHENS: ASPROPYRGOS, ATTICA, GR: 193 00,
Tel: +30 211 60 03 500-599, +30 210 55 16 500,
+30 210 55 98 350, Fax: +30 210 55 99 612
THESSALONIKI: INDUSTRIAL PARK-SINDOS, S.B. 44,
STREET, DA 10, GR: 570 22,
Tel: +30 2310 795 797, +30 2310 797 365,
Fax: +30 2310 797 367
Email: info@durostick.com

The technical specifications and directions of use contained in this technical data sheet are the results of the knowledge and experience of the company's research and development department, as well as from the real-life applications of the product. The recommendations and suggestions regarding the use of the products are made without guarantee since the respective conditions during their application are beyond the control of the company. For this reason, it is the user's responsibility to make sure that the product is suitable for the intended application as well as the application conditions of the project.