
# HYDROSTOP PLASTER ELASTIC



# Flexible, waterproofing cementitious plaster of 24 colors - GRAFIATO

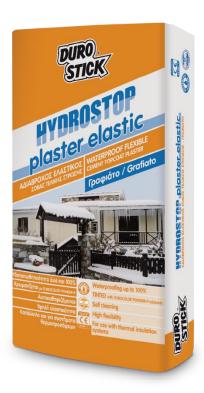

#### **■ PROPERTIES**

Flexible and waterproofing, self cleaning top coat plaster, with grain size of up to 4mm. It contains new age, flexible and water repelling resins. Offers complete water repellency, per DIN 18550, high flexibility, unbreakable adhesion, unblocked breathability and water vapour permeability. Does not favour mold creation, and does not absorb atmospheric pollutants. Does not crack like regular plasters do and corrects construction defects up to 8mm per coat. Can be applied over cracked marble based, (but sound) plasters.

Easily applied by either hand or plastering machine. It participates as a topcoat render to the External Thermal Insulation Composite System for buildings THERMOSEAL of DUROSTICK and is in compliance with the requirements of EAD 040083-00-0404, ETA 13/0006 and ETA 13/0007.

Classified GP: CSIII/Wc2 per EN 998-1.

Can be colored in 24 colors by adding the 250gr bags of pigments in pow-der form, DUROCOLOR POWDER-C of DUROSTICK into the mixing water.

#### **■ CONSUMPTION**

2.0kg/m²/mm thick coat.

## **■ PACKAGING**

Paper bag of 25kg on 1,500kg pallet.

### **DUROSTICK S.A.,**

MANUFACTURING OF ADHESIVES, PAINTS & MORTARS

**ATHENS:** ASPROPYRGOS, ATTICA, GR: 193 00, Tel: +30 211 60 03 500-599, +30 210 55 16 500, +30 210 55 98 350, Fax: +30 210 55 99 612

THESSALONIKI: INDUSTRIAL PARK-SINDOS, S.B. 44.

STREET, DA 10, GR: 570 22,

Tel: +30 2310 795 797, +30 2310 797 365,

Fax: +30 2310 797 367 Email: info@durostick.com

The technical specifications and directions of use contained in this technical brochure are the results of the knowledge and experience of the company's research and development department, as well as from the real-life applications of the product. The recommendations and suggestions regarding the use of the products are made without guarantee since the respective conditions during their application are beyond the control of the company. For this reason, it is the user's responsibility to make sure that the product is suitable for the intended application as well as the application conditions of the project.