


# EASYFIX



Fiber-reinforced, polymer modified repair mortar, for thicknesses of up to 7cm/coat

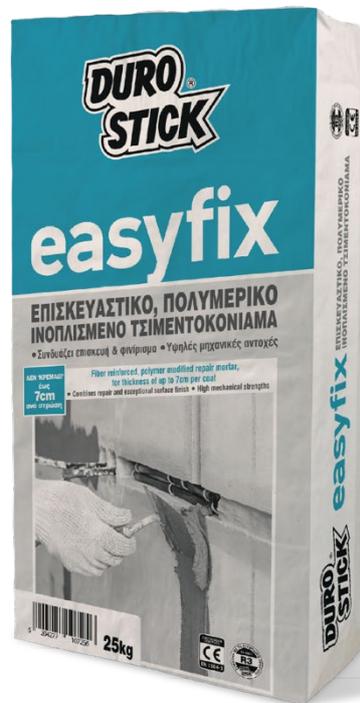

## ■ PROPERTIES

Fiber-reinforced repair cementitious mortar with controlled shrinkage. It presents strong adhesion to the substrate and develops early mechanical strength.

Classified PCC R3 as concrete repair product, per EN 1504-3.

## ■ ADVANTAGES

- Combines repair and surface finish
- Excellent workability
- High thixotropy, does not sag in thicknesses of up to 7cm thick
- Fast repair, without cracks
- Does not contain chlorides that cause corrosion
- High mechanical strengths
- High resistance to frost.

## ■ APPLICATIONS

DUROSTICK EASYFIX is ideal for repairing and smoothing concrete elements on both horizontal and vertical surfaces.

Suitable for filling concrete defects on floors, walls and roofs. Also suitable for creating roof coving mortars etc.

## ■ USE

### 1. Surface preparation

The substrate must be free from loose sections, dust, oils, and must be thoroughly soaked. Alternatively, prime the substrate using the micromolar stabilizer AQUAFIX of DUROSTICK before application.

### 2. Application

Empty EASYFIX in a clean container with cool water, at a ratio of 25kg mortar to 5.0lt of water. Mix with a low rpm electric mixer or use a cement mixer, until a lump free, homogeneous mass is created that is suitable for every application. The mixture remains workable for two hours. Apply the mortar by either pressing it with a gauging trowel when performing repairs or by using an injection machine, when surfaces require a coating product with high mechanical strength.

# EASYFIX



## Fiber-reinforced, polymer modified repair mortar, for thicknesses of up to 7cm/coat

### ■ NOTES

- When the steel reinforcement (rebar) is corroded, remove all the rust with RUST REMOVER of DUROSTICK and apply DUROSTICK RUST FREE POWDER, the cementitious corrosion inhibitor for rebar protection
- Adding DUROSTICK D-20 in the mixing water at a ratio of 1:3 or DUROMAX at a ratio of 1:6, increases its flexibility and watertightness, but also changes its setting time
- Do not add any water if the mixture has started to cure
- Protect the final surface with wet burlap or occasional soaking for the next 24 hours (especially in the summer months).

### ■ CLEANING

Clean all tools and equipment with water, immediately after use. The cured product can only be removed by mechanical means.

### ■ CONSUMPTION

Approximately 15kg/m<sup>2</sup>/cm thick coat.

### ■ STORAGE

Store in the factory sealed packages, in dry and shaded places for 12 months from production date.

### ■ SAFETY DIRECTIONS

The product contains Portland cement. Before use, refer to the cautions on the product packaging or the Safety Data Sheet.

**DUROSTICK S.A.,**  
 MANUFACTURING OF ADHESIVES,  
 PAINTS & MORTARS  
**ATHENS:** ASPROPYRGOS, ATTICA, GR: 193 00,  
 Tel: +30 211 60 03 500-599, +30 210 55 16 500,  
 +30 210 55 98 350, Fax: +30 210 55 99 612  
**THESSALONIKI:** INDUSTRIAL PARK-SINDOS, S.B. 44,  
 STREET, DA 10, GR: 570 22,  
 Tel: +30 2310 795 797, +30 2310 797 365,  
 Fax: +30 2310 797 367  
 Email: [info@durostick.com](mailto:info@durostick.com)

### ■ PACKAGING

Paper bag of 25kg on 1.500kg pallet

TECHNICAL SPECIFICATIONS (Measurement conditions 20°C and 50% R.H.)	
■ Form - Color	Cementitious mortar - Gray
■ Bulk density of dry mortar	1.40±0.05kg/lit
■ Bulk density of fresh mortar	1.80±0.05kg/lit
■ Maximum grain size	1.3mm
■ Water requirement	5.0lit water for 25kg mortar
■ Application temperature	From +5°C to +35°C
■ Temperature resistance	From -25°C to +80°C
■ Pot life	2 hours
■ Maximum application thickness per coat	7cm
■ Minimum application thickness per coat	3mm
■ Chloride ion content, per EN 1015-17	≤ 0.01%

PRODUCT PERFORMANCES	
■ Resistance to flexion, per EN 12190, to:	
• 28 days	≥ 5.00 N/mm <sup>2</sup>
■ Compression resistance , per EN 12190, to:	
• 48 hours	≥ 9.00 N/mm <sup>2</sup>
• 7 days	≥ 21.00 N/mm <sup>2</sup>
• 28 days	≥ 38.00 N/mm <sup>2</sup>
■ Adhesion to concrete per EN 1542	≥ 1.70 N/mm <sup>2</sup>
■ Elastic modulus per EN 13412	≥ 15.00 GPa
■ Resistance to carbonation per EN 13295	Yes
■ Thermal compatibility expressed as adhesion to concrete, per EN 13687, after:	
• 50 freeze-thaw cycles	≥ 1.60 N/mm <sup>2</sup>
• 30 storm cycles	
• 30 dry heat cycles	
■ Capillary water absorption w per EN 13057	w ≤ 0.50kg.m <sup>-2</sup> .h <sup>-0.5</sup>
■ Reaction to fire	Class A1

Where 1 N/mm<sup>2</sup>=1MPa

The technical specifications and directions of use contained in this technical data sheet are the results of the knowledge and experience of the company's research and development department, as well as from the real-life applications of the product. The recommendations and suggestions regarding the use of the products are made without guarantee since the respective conditions during their application are beyond the control of the company. For this reason, it is the user's responsibility to make sure that the product is suitable for the intended application as well as the application conditions of the project.