




## Solvent-based matte varnish for microcement and natural stone

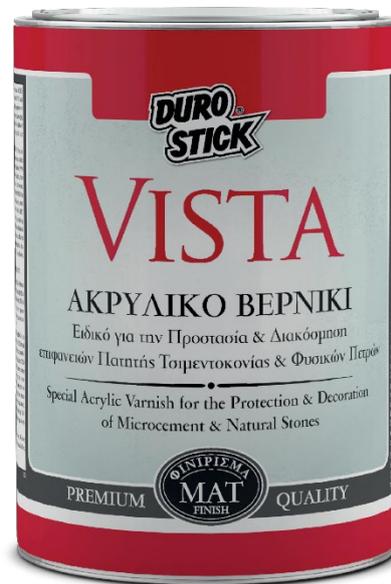

### ■ PROPERTIES

Acrylic clear impregnation varnish with a matte finish. It has strong UV filters, and it is extremely resistant to solar radiation, providing long lasting protection. It does not peel off or turn yellow over time. It creates a strong, water and oil repellent protective film that does not shine. It enhances any surface applied on and highlights their natural tones and colors. Apply it on natural stone linings on floors and building facades to create the effect of the 'permanent wet' look, without any luster. It will also highlight the unique beauty of the texture and colors of each and every stone used to line the surface.

### ■ APPLICATIONS

VISTA of DUROSTICK is applied where there is requirement for a matte finish. Furthermore, use it where particular resistance to abrasion and protection against adverse weather conditions are necessary (sunlight and snow). Use it also where the frequent cleaning of interior spaces is required. The perfect aesthetic effect that the application of VISTA creates, makes it the ideal choice for coating the surfaces of the decorative microcements DS-250, DS-252 FLEX, DS-254 IRON and DS-256 FLEX VELVET of DUROSTICK, and the microcement in paste form

DS-258 DECO MICRO FLEX, the decorative cement mortar DS-259 DECO MICRO RESIN as well as any natural stone lining on floors or building facades. Suitable for interior and exterior surface applications.

### ■ USE

#### 1. Surface preparation

Surfaces must be clean, thoroughly dry and they must have gained their full mechanical strength. It is necessary to allow for 3-4 weeks to pass from any natural slab installation and grouting completion. Once thoroughly dry, make sure that they are properly cleaned using DUROSTICK D-7, the natural stone cleaner, to remove any construction residues or grout

#### 2. Application

VISTA is a ready to use product. Mix well before use and apply on clean and dry surfaces using a varnish roller or a brush, in two consecutive coats. Between coats, allow for 3-4 hours to pass as drying time, always depending on the ambient conditions.

### ■ CLEANING

Clean all tools with THINNER 201 of DUROSTICK, immediately after use.



## Solvent-based matte varnish for microcement and natural stone

### ■ CONSUMPTION

1lt/5-8m<sup>2</sup>, depending on the absorbency of the surface.

### ■ STORAGE

Store in closed containers away from any heat source, for 24 months from production date.

### ■ SAFETY DIRECTIONS

The product is classified as highly flammable and harmful. It is recommended to keep away from the reach of children and apply it in well ventilated areas. Before use, refer to the cautions on the product packaging or the Safety Data Sheet.

### ■ NOTES

- For exterior natural floor slabs next or close to gardens, it is recommended to impregnate them first with the waterproofer RENOLIT as a preventive measure in order to protect both the slab and varnish from rising damp, ensuring long-term protection of the lining.
- Any surface decorated with the varnish VISTA of DUROSTICK must not come into contact with water for at least 24 hours after application.

### ■ PACKAGING

Carton box with 12pcs of 750ml each one  
 Carton box with 4pcs of 2.5lt each one  
 15lt container (special order)

TECHNICAL SPECIFICATIONS	
■ Form - Color	Liquid - Transparent
■ Resin	Acrylic
■ Bulk density	0.94±0.05kg/lt
■ Solids by weight	32-35% w/w
■ Application temperature	From +5°C to +35°C
■ Temperature resistance	From -30°C to +80°C
■ Gloss	1st coat: matte finish 2nd-3rd coat: satin finish
■ Drying time	3-4 hours, depending on ambient -conditions (humidity, temperature)

### V.O.C. (Volatile Organic Compounds):

Limit value of maximum content of V.O.C. per EU (Directive 2004/42/CE) for this product (category A/h: 'Binding primers', type SB): 750gr/lt (2010). The ready to use product contains maximum 749gr/lt V.O.C.

**DUROSTICK S.A.,**  
 MANUFACTURING OF ADHESIVES,  
 PAINTS & MORTARS  
**ATHENS:** ASPROPYRGOS, ATTICA, GR: 193 00,  
 Tel: +30 211 60 03 500-599, +30 210 55 16 500,  
 +30 210 55 98 350, Fax: +30 210 55 99 612  
**THESSALONIKI:** INDUSTRIAL PARK-SINDOS, S.B. 44,  
 STREET, DA 10, GR: 570 22,  
 Tel: +30 2310 795 797, +30 2310 797 365,  
 Fax: +30 2310 797 367  
 Email: [info@durostick.com](mailto:info@durostick.com)